


図面／規格

ナイロんなット(1種)

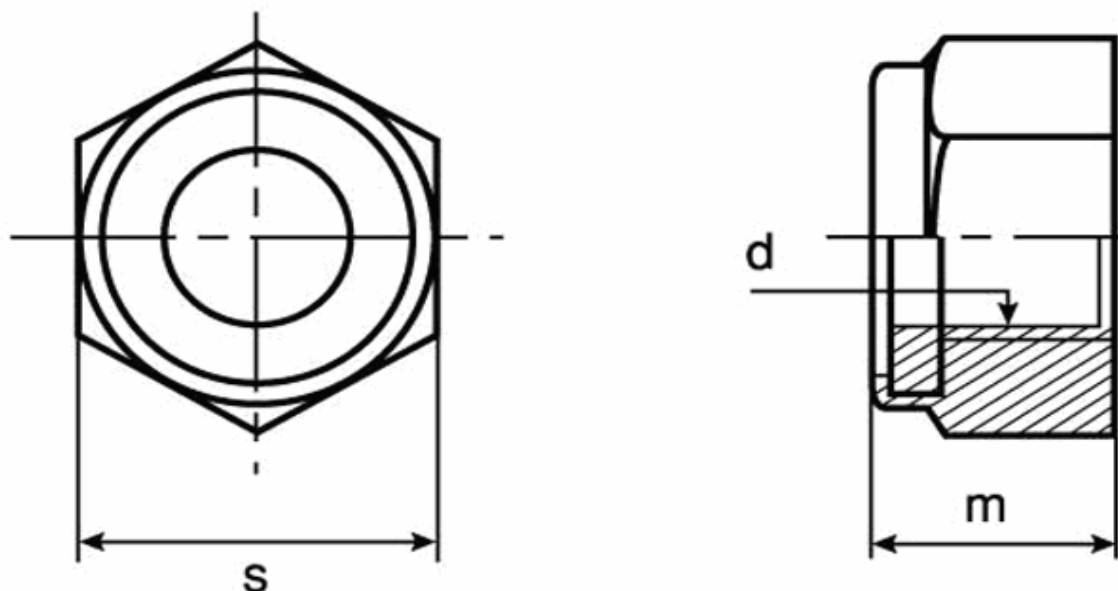

<鉄・BS>

ねじの呼び径 (d)	ピッチ 並目	平径 (S)	高さ (m)
M2	0.4	4.5	2.5
M3	0.5	5.5	4.3
M4	0.7	7	5.5
M5	0.8	8	6.0
M6	1.0	10	8.0
M8	1.25	13	10
M10	1.5	17	12
M12	1.75	19	14.4
M14	2.0	22	16
M16	2.0	24	18
M18	2.5	27	20
M20	2.5	30	20
M22	2.5	32	22
M24	3.0	36	24
M27	3.0	41	27
M30	3.5	46	30

<SUS・SUS316>

ねじの呼び径 (d)	ピッチ 並目	平径 (S)	高さ (m)
M1	0.25	2.25	1.5
M2	0.4	4	2.4
M3	0.5	5.5	4.0
M4	0.7	7	5.0
M5	0.8	8	6.5
M6	1.0	10	8.0
M8	1.25	13	9.8
M10	1.5	17	12
M12	1.75	19	14.4
M14	2.0	22	16
M16	2.0	24	18
M18	2.5	27	20
M20	2.5	30	22
M22	2.5	32	23.4
M24	3.0	36	24
M27	3.0	41	27
M30	3.5	46	30
M33	3.5	50	33
M36	4.0	55	36